

PS-1930 PRO SERIES

SELF-PROPELLED MOBILE ELEVATED WORK PLATFORM



THE PROFESSIONAL TRADES LIFT OF CHOICE TO ACCESS MORE JOBS...

STANDARD FEATURES

- ▶ Proportional Controls
- ▶ Electric Drive and Steer
- ▶ 110V-AC Power-to-Platform
- ▶ LeakGuard™ Ready
- ▶ Indoor/Outdoor Operation Settings
- ▶ Horn
- ▶ Maintenance Charger
- ▶ Intelligent Control System
- ▶ Manual Decent Pull Cable
- ▶ Dual Maintenance Locks
- ▶ Active Tilt Alarm
- ▶ Active Load Sensing
- ▶ Low Floor Load Pressures
- ▶ Pothole Protection
- ▶ Fork Lift Pockets
- ▶ 8 in Inside Turn Radius
- ▶ Easy Glide Slide Out Extension
- ▶ 30% Gradeability
- ▶ Solid Rubber, Non-Marking Wheels
- ▶ Default Upper Control Setting
- ▶ No Folding Rails Needed
- ▶ Recessed Charger and Power-to-Platform Outlets in Base
- ▶ Cantilever Gate
- ▶ 2 Year Parts Warranty
- ▶ 5 Year Structural Warranty

OPTIONS

- ▶ LeakGuard™ Fluid Containment System
- ▶ Flashing Beacon
- ▶ AGM Batteries
- ▶ Inverter
- ▶ All Motion Alarm

STANDARDS COMPLIANCE

- ▶ ANSI A92.20
- ▶ CSA B354.6:17



PS-1930

PRO SERIES




SELF-PROPELLED MOBILE ELEVATED WORK PLATFORM

DIMENSIONS

A	Working Height (1 Person Indoor)	25 ft	7.5 m
	Working Height (2 Person Indoor/1 Person Outdoor)	17.6 ft	5.4 m
B	Platform Height Max (1 Person Indoor)	19 ft	5.7 m
	Platform Height Max (2 Person Indoor/ 1 Person Outdoor)	11.6 ft	3.5 m
C	Platform Height Min	31 in	78.7 cm
D	Ground Clearance Elevated	0.3 in	0.8 cm
E	Ground Clearance Lowered	3.0 in	7.6 cm
F	Overall Length w/step	69.5 in	176.6 cm
G	Overall Width	30 in	76.2 cm
H	Stowed Height	74 in	188.7 cm
I	Platform Length	60 in	152.4 cm
J	Platform Width	24 in	61.0 cm
K	Platform Extension	30 in	76.2 cm

SPECIFICATIONS

Platform Capacity	650 lbs	295 kg
Rated Occupancy (Indoor/Outdoor)	2/1 Person(s)	
Extension Capacity	250 lbs	113 kg
Weight	1985 lbs	900 kg
Gradeability	30%	
Inside Turn Radius	8 in	20.3 cm
Drive Speed Raised (Proportional)	0.6 mph	0.3 m/s
Drive Speed Lowered (Proportional)	2.5 mph	1.1 m/s
Lift Speed Up/Down	28/28 sec	
Power Source	24V DC	
Tires	4/12 in	4/30.5 cm
Wheel Load Min	107.0 psi	737.7 kPa
Wheel Load at 500 lbs Capacity	122.2 psi	842.5 kPa
Wheel Load Max (at 650 lbs Capacity)	126.7 psi	873.6 kPa

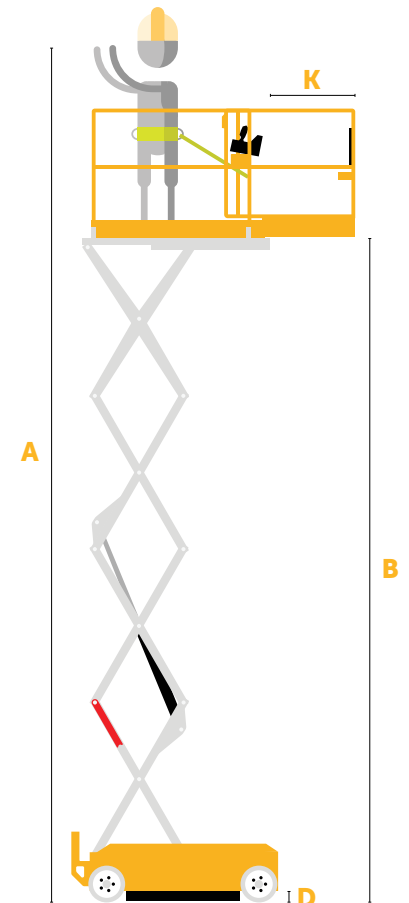

This brochure is for illustrative purposes only and based on the latest information available at the time of printing. Hy-Brid Lifts™ reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Hy-Brid Lifts™ is a trademark of Custom Equipment LLC. ©2021 Custom Equipment LLC. All rights reserved.
03|21 Part No. PS-0003

HY-BRID LIFTS™
BY CUSTOM EQUIPMENT LLC